


► Product Appearance




► Product Size

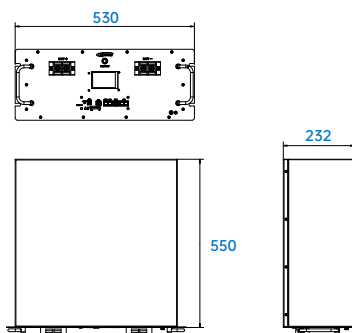

Net Weight: 90.1±0.5kg

► Packaging Size

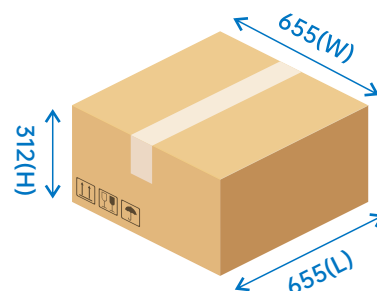

Gross Weight: 94.8±0.5kg


► Features

- A grade brand new prismatic LiFePO₄ cells
- > 4000 cycles @90% DOD(25°C, 0.5C)
- Over charge, over discharge, over temperature, low temperature, over current and short circuit protection
- LCD display screen to monitor cell SOC, voltage, temperature and alarm status
- Cell balance function
- Rack-mounted style
- Certificate: UN38.3, MSDS, IEC62619
- Max 8 battery packs can be connected in parallel


► Technical Specifications

Model		LFP10.5KWH51.2V-P20R2GF30
Electrical Parameter		
Battery type		LiFePO ₄
Nominal voltage		51.2V
Nominal capacity		205Ah
Energy		10500Wh
Pack mode		16S1P
Continuous discharge current		100A
Charge cut-off voltage		57.6V
Discharge cut-off voltage		41.6V
Max. charge current		150A
Max. discharge current		200A
Peak discharge current		240A
Recommend discharge current		100A
Recommend discharge depth		80%
Cycle life		> 4000 cycles (25°C, 0.5C) 90% DOD
Communication		RS485/RS232/CAN
Display		LCD
Environmental Parameter		
Charge & discharge temperature		Charge: 0°C~+55°C Discharge: -20°C~+60°C
Optimal storage temperature		5°C ~ +35°C
Relative humidity		40%-80%
Ingress protection		IP20
Mechanical Parameter		
Terminal		Quick-plug
Dimensions (WxHxD) (mm)		550x530x232
Weight (Kg)		90.1±0.5
Certificate		UN38.3, MSDS, IEC62619


Different Rate Discharge Curve@25°C

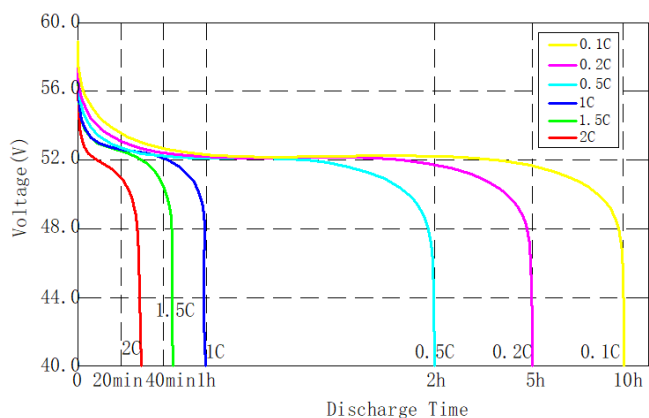


Different Temperature Discharge Curve@0.5C

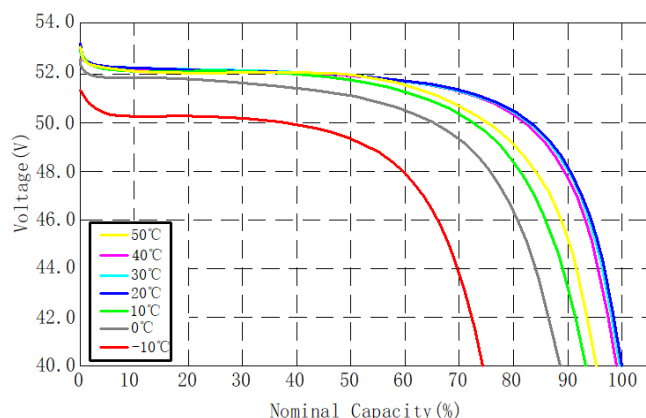


State of Charge Curve@0.5C 25°C

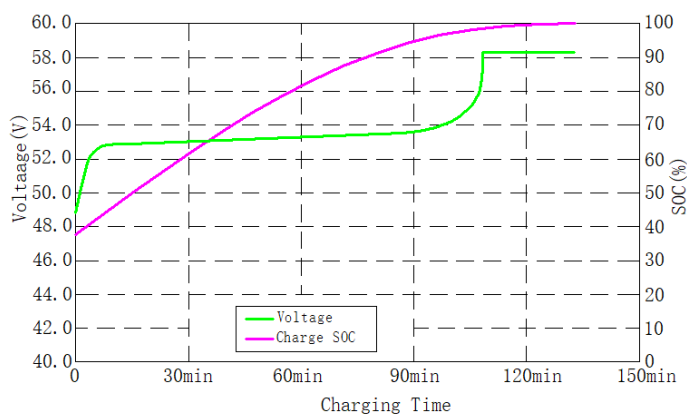

Charging Characteristics @0.5C 25°C

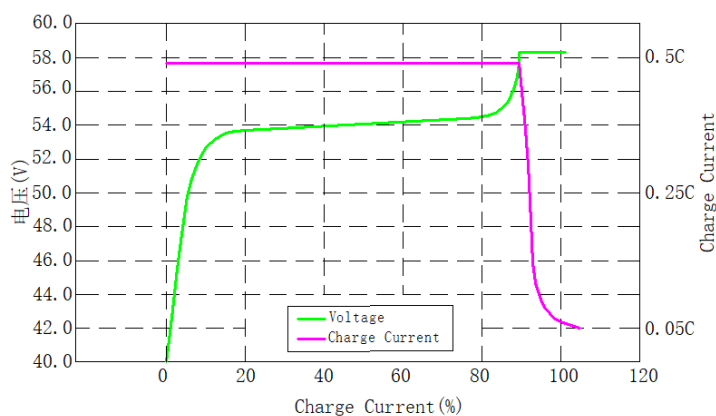

Different DOD Discharge Cycle Life Curve@0.5C 25°C

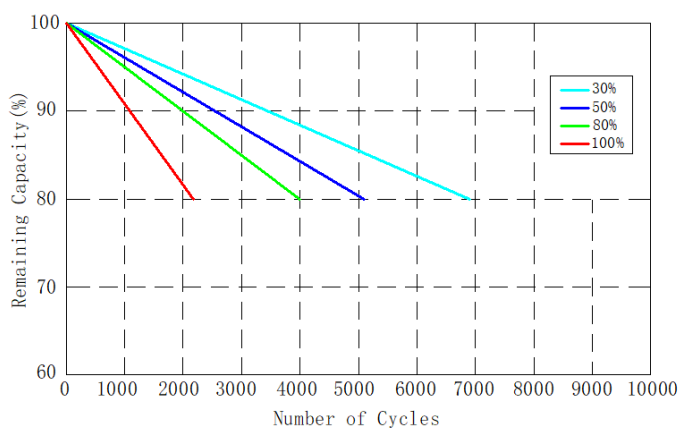

Different Temperature Self Discharge Curve

