


► Product Appearance




► Product Size

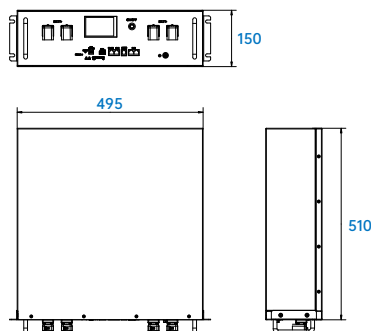

Net Weight: 45.6±0.5kg

► Packaging Size

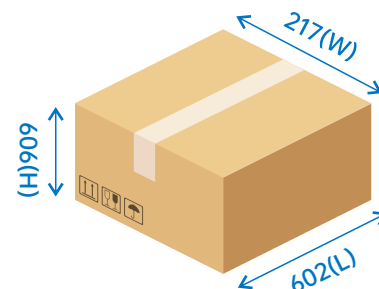

Gross Weight: 51.9±0.5kg


► Features

- A grade brand new prismatic LiFePO₄ cells
- > 6000 cycles @80% DOD(25°C, 0.5C)
- Over charge, over discharge, over temperature, low temperature, over current and short circuit protection
- LCD display screen to monitor cell SOC, voltage, temperature and alarm status
- Metal Case, excellent heat dissipation, more safety
- Rack-mounted style
- Certificate: UN38.3, MSDS, IEC62619
- Max 8 battery packs can be connected in parallel


► Technical Specifications

Model		LFP4.8KWH48V-P20R4
Electrical Parameter		
Battery type		LiFePO ₄
Nominal voltage		48V
Nominal capacity		100Ah
Energy		4800Wh
Pack mode		15S1P
Continuous discharge current		50A
Charge cut-off voltage		54V
Discharge cut-off voltage		39V
Max. charge current		50A
Max. discharge current		100A
Peak discharge current		120A
Recommend discharge current		50A
Recommend discharge depth		80%
Cycle life		> 6000 cycles (25°C, 0.5C) 80% DOD
Communication		RS485/RS232/CAN
Display		LED+LCD
Environmental Parameter		
Charge & discharge temperature		Charge: 0°C~+55°C Discharge: -20°C~+60°C
Optimal storage temperature		5°C ~ +35°C
Relative humidity		40%-80%
Ingress protection		IP20
Mechanical Parameter		
Terminal		M6
Dimensions (WxHxD) (mm)		495x510x150
Weight (Kg)		45.6±0.5
Certificate		UN38.3, MSDS, IEC62619


Different Rate Discharge Curve@25°C

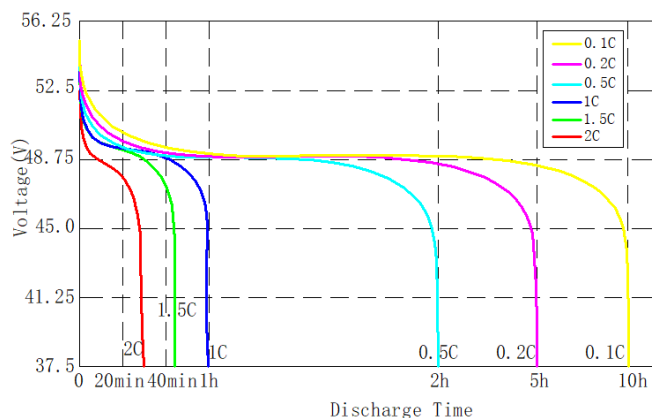


Different Temperature Discharge Curve@0.5C

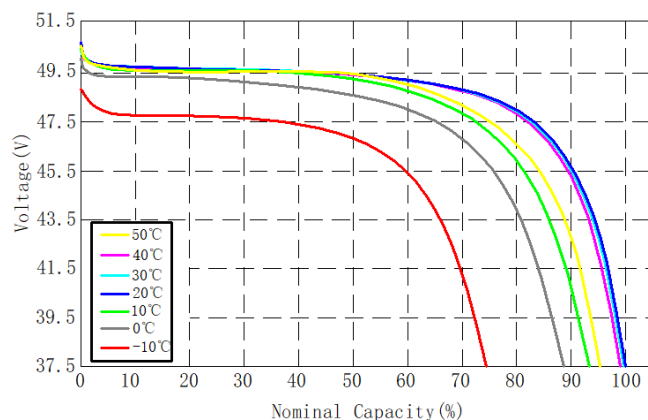


State of Charge Curve@0.5C 25°C

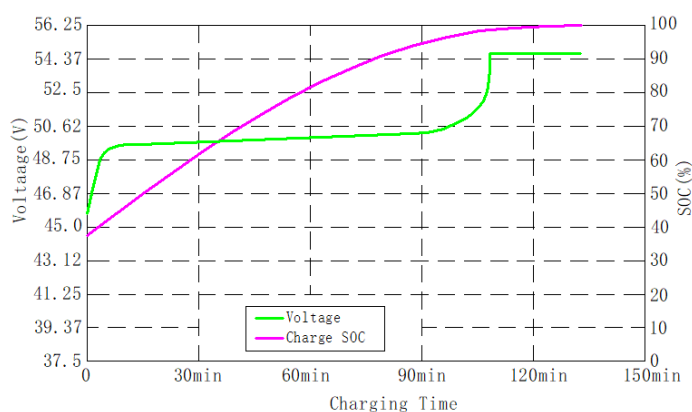

Charging Characteristics @0.5C 25°C

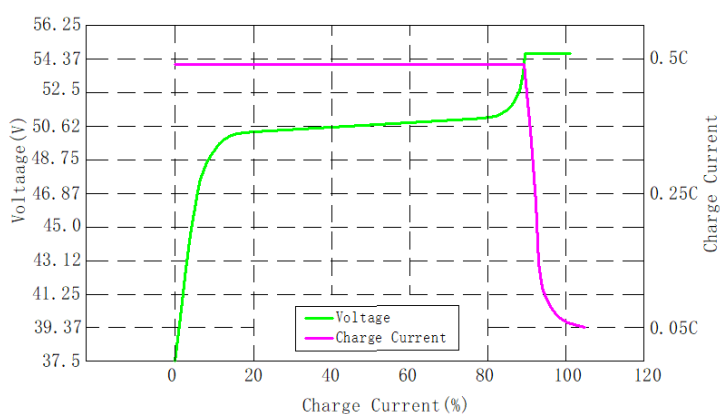

Different DOD Discharge Cycle Life Curve@0.5C 25°C

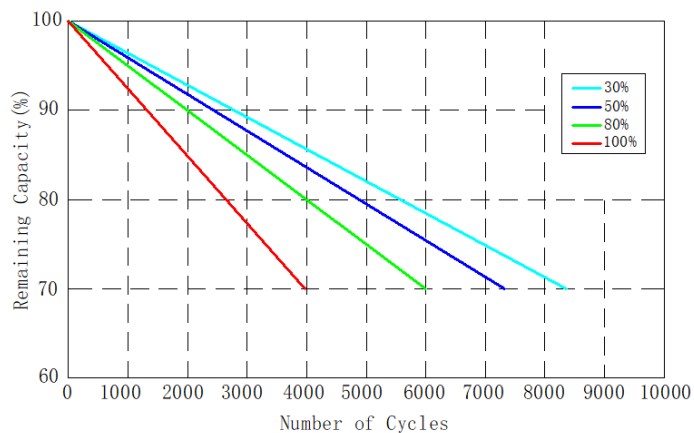

Different Temperature Self Discharge Curve

